


ITA22

BATTERY STRAPPING TOOL FOR POLYPROPYLENE AND POLYESTER STRAP WITH VIBRATION SEALING

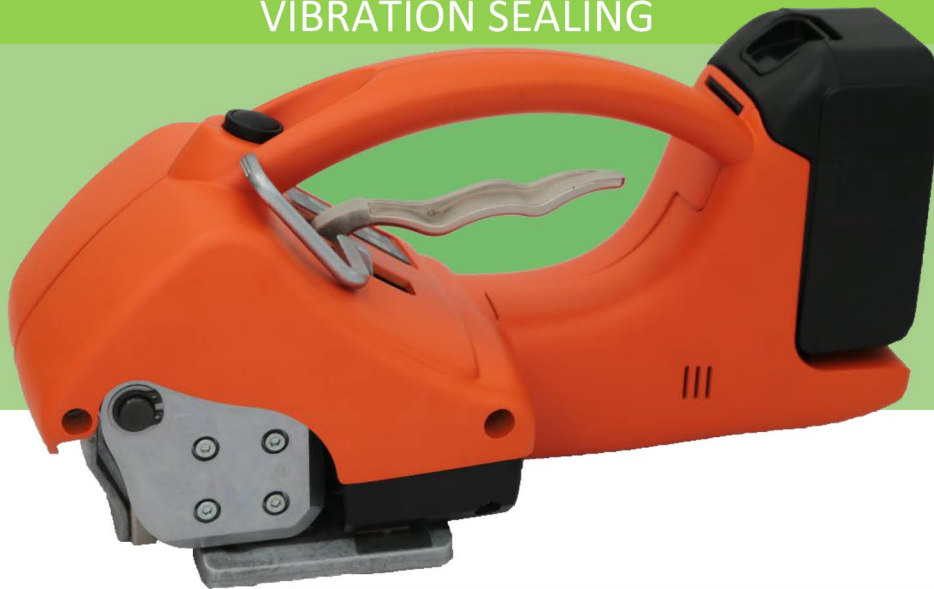

TECHNICAL SPECIFICATIONS

DIMENSIONS

Lenght	316 mm – 12.44"
Width	140 mm – 5.51"
Height	160 mm – 6.30"
Weight	3.8 Kg – 8.8 lbs

FEEDING

Battery	14.4 V – 3 Ah Li-ion
---------	----------------------

PERFORMANCE

Max. tension force	1500N
Tensioning speed	8 mt/min
Sealing	Vibration Sealing
Joint strenght	75% of breaking strenght

MODEL

CODE	TYPE	STRAP	THICKNESS
T229997	ITA22 with one battery	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,7mm – 0.02"÷0,03"
T2299971	ITA22 with one battery and charger	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,8mm – 0.02"÷0,03"
T2299972	ITA22 with two battery and charger	PP 13/16mm-0.55"/0.63" PET 13/16mm-0.55"/0.63"	0,5÷1.05mm – 0.02"÷0.04" 0,5÷0,8mm – 0.02"÷0,03"

POLYESTER STRAP



POLYPROPYLENE STRAP



info@avantpack.es
+34 961 41 24 98
www.avantpackembalajes.es
C/Mar, P.I L' Horteta 46138 - Rafelbunyol

