



Ring diametro piccolo 40 • 60

Avvolgitrice Automatica Orizzontale • piccolo diametro
Horizontal Automatic Wrapping Machine • small diameter

SCHEDA TECNICA

RING 40 E RING 60

DIAMETRO RULLA:
mm. 400 (Ring 40)
mm. 600 (Ring 60)

VELOCITA' OPERATIVA:
sino a 300 RPM (Ring 40)
sino a 220 RPM (Ring 60)

GRUPPO PINZA E TAGLIO:
automatico ad azionamento pneumatico
taglio con lama dentata

TRASPORTATORI IN INGRESSO/USCITA:
a rulli folli o motorizzati
secondo richiesta

GUIDE LATERALI IN INGRESSO/USCITA:
a regolazione manuale automatica
secondo richiesta

PRESSORI IN INGRESSO/USCITA:
ad azionamento pneumatico


FILM ESTENSIBILE:
fascia mm. 125 - 250 secondo richiesta
diametro interno mm. 76
diametro esterno mm. 250

ALLACCIAMENTO ELETTRICO:
400V - 50Hz - 3F

ALLACCIAMENTO PNEUMATICO:
6 bar



Pannello di Controllo
Control Panel

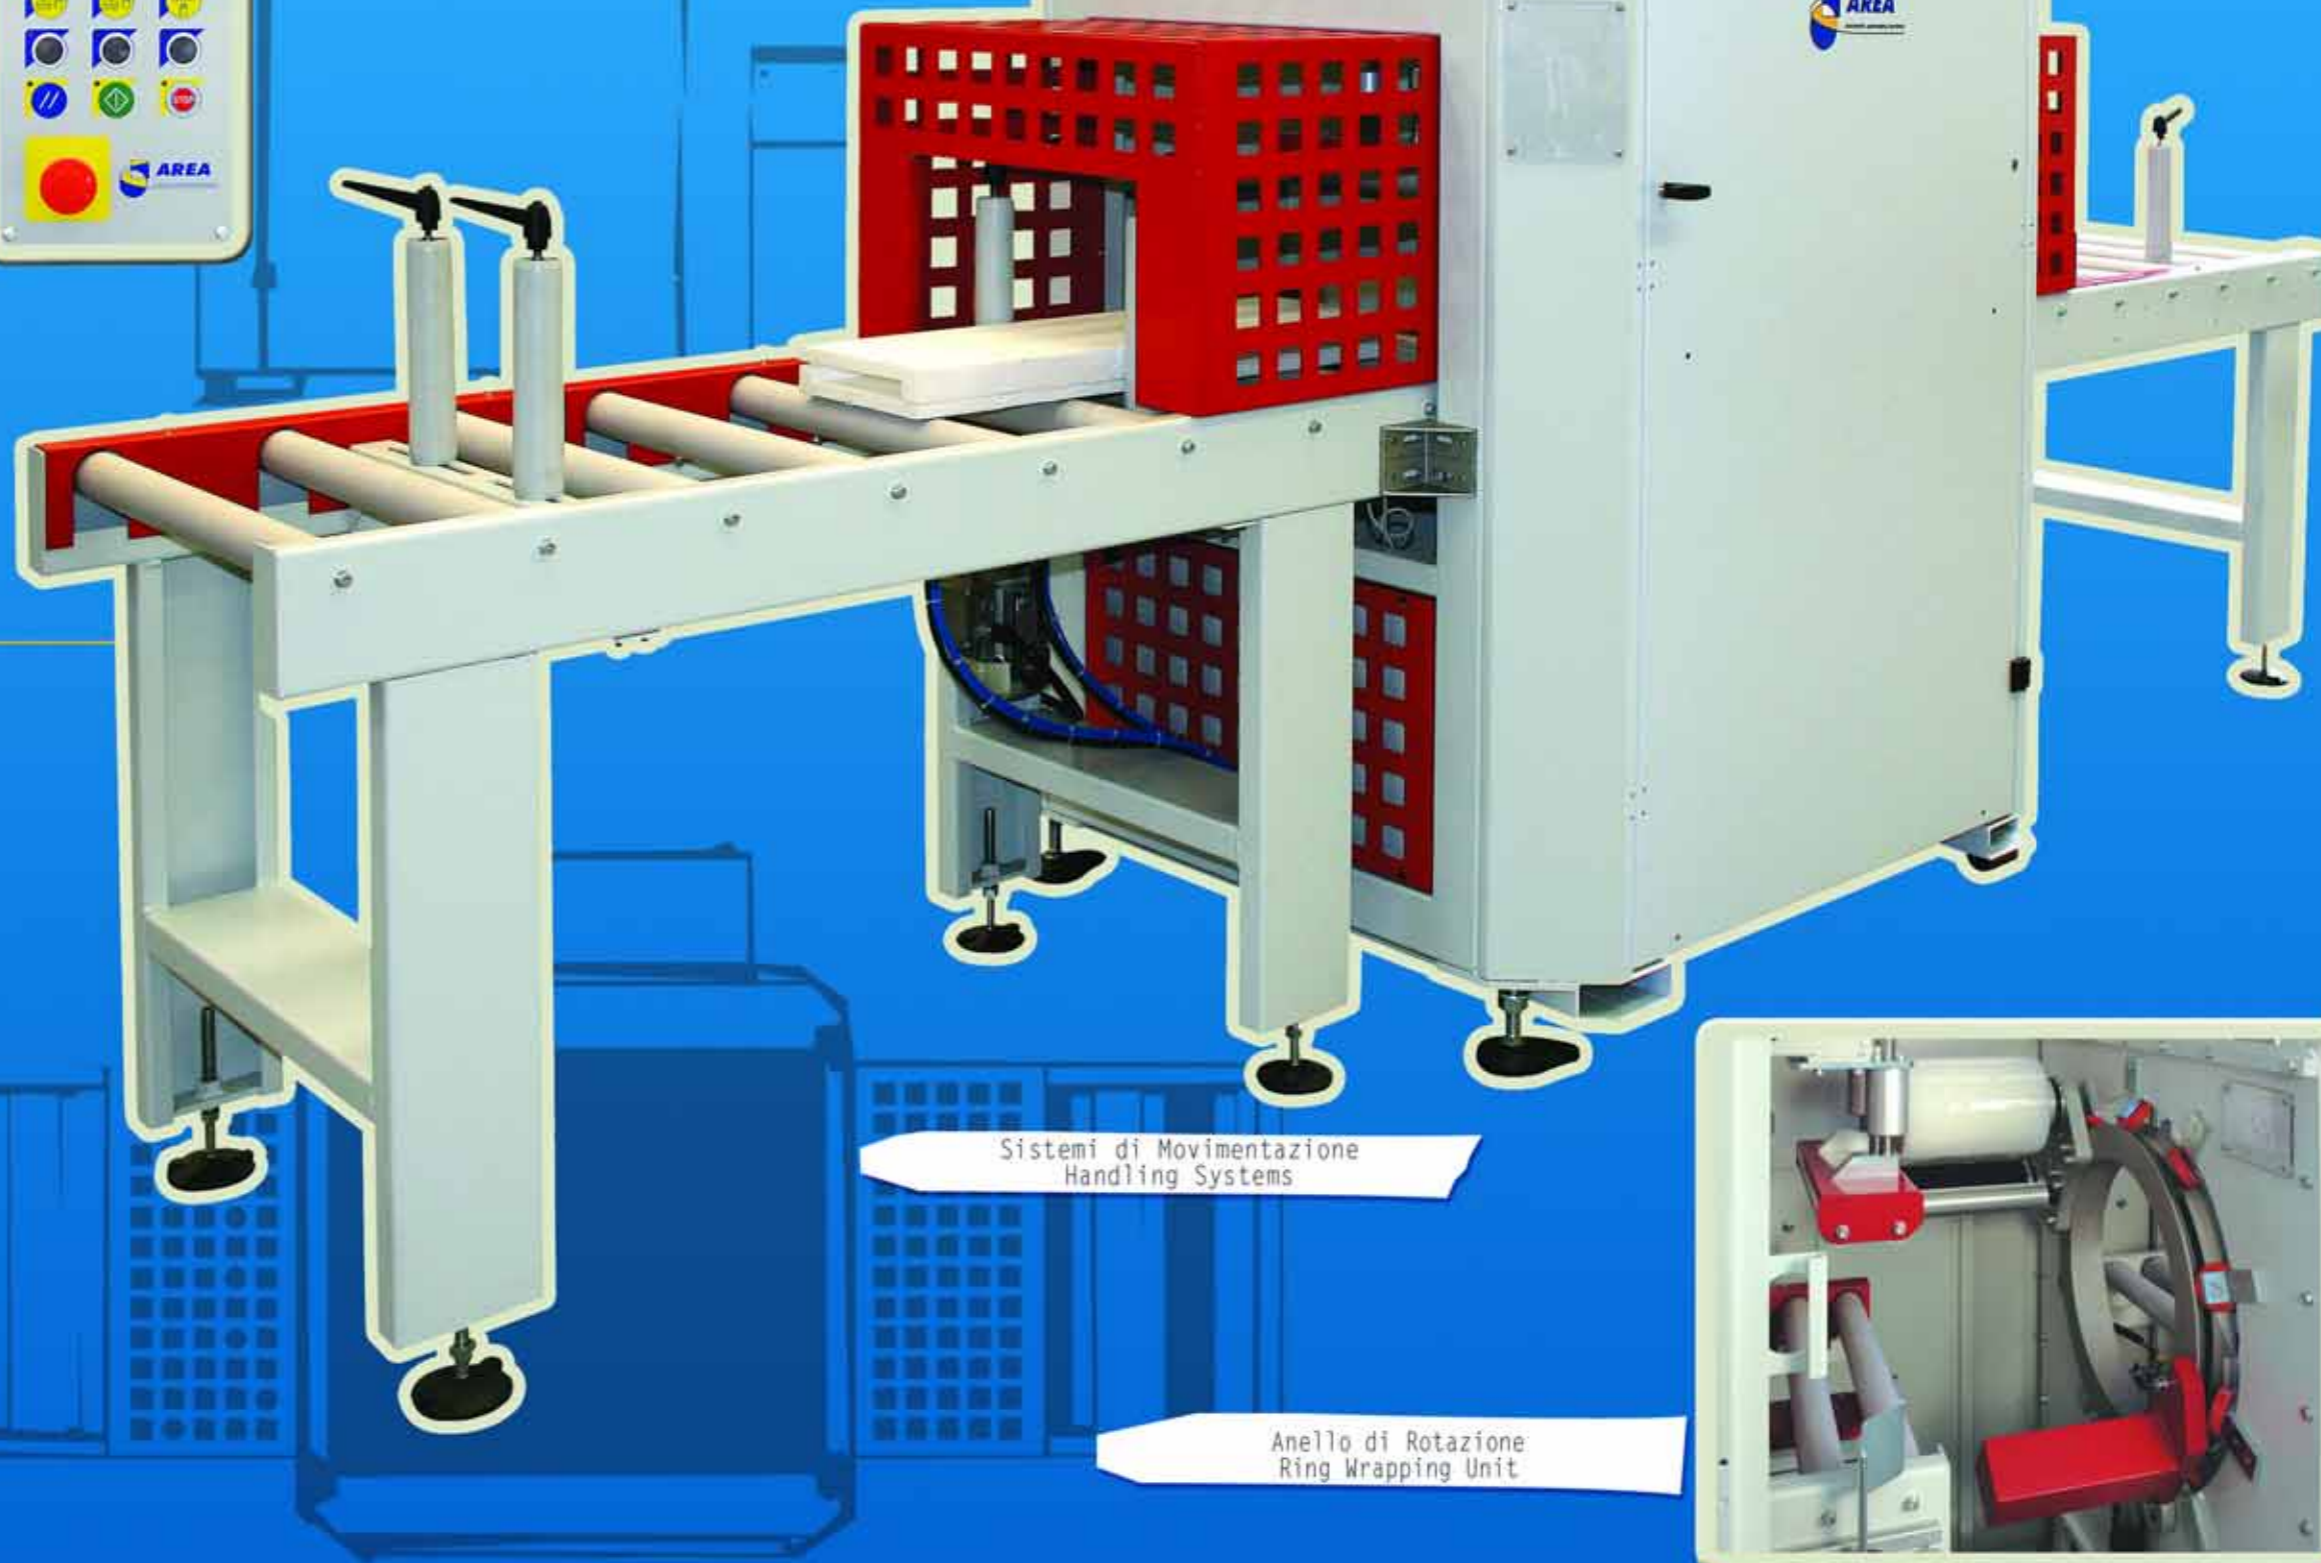

small diameter Ring 40 • 60

TECHNICAL DETAILS

RING 40 & RING 60

RING DIAMETER:
mm. 400 (Ring 40)
mm. 600 (Ring 60)

OPERATING SPEEDS:
until 300 RPM (Ring 40)
until 200 RPM (Ring 60)

CLAMP AND CUT OF THE FILM:
automatic, pneumatically operated
- cutting with a toothed blade

INFEEED AND OUTFEED CONVEYORS:
with idle or powered rolls on request

INFEEED AND OUTFEED SIDE GUIDE UNIT:
with manual or automatic regulation
on request

INFEEED AND OUTFEED PRESSURE UNIT:
pneumatically operated

STRETCH FILM:
width mm. 125 - 250 on request
internal diameter mm. 76

ELECTRIC CONNECTION:
400V - 50Hz - 3 PH

PNEUMATIC CONNECTION:
6 bar

Sistemi di Movimentazione
Handling Systems

Anello di Rotazione
Ring Wrapping Unit





Via Papa Giovanni XXIII, 18/20 - 20090 RODANO - Millepini (MI) Italy
Tel. +39.02.95.32.72.81 r.a. email: uvendite@areapackaging.com
Fax +39.02.95.32.72.97 www.areapackaging.com

Automatic packaging systems

www.areapackaging.com

Ring